

# CONTINENTAL TME27


**74.0 HP GASOLINE  
DUAL FUEL, LPG &  
NG OPTIONS**

**Y O U R  
H E A V Y - D U T Y  
S O U R C E O F  
P O W E R**

Setting industry standards since the turn of the 20th century. Continental offers you a liquid-cooled gasoline engine ranging to 74 horsepower. Continental continues to offer you the only engine within its class, "INDUSTRIAL BY DESIGN."

## **CONTINENTAL CONSTRUCTION**

Continental Engines are designed for worldwide acceptance and are the first metric industrial engine produced in the United States. This heavy-duty source of power offers outstanding reliability and durability for a wide variety of industrial applications.

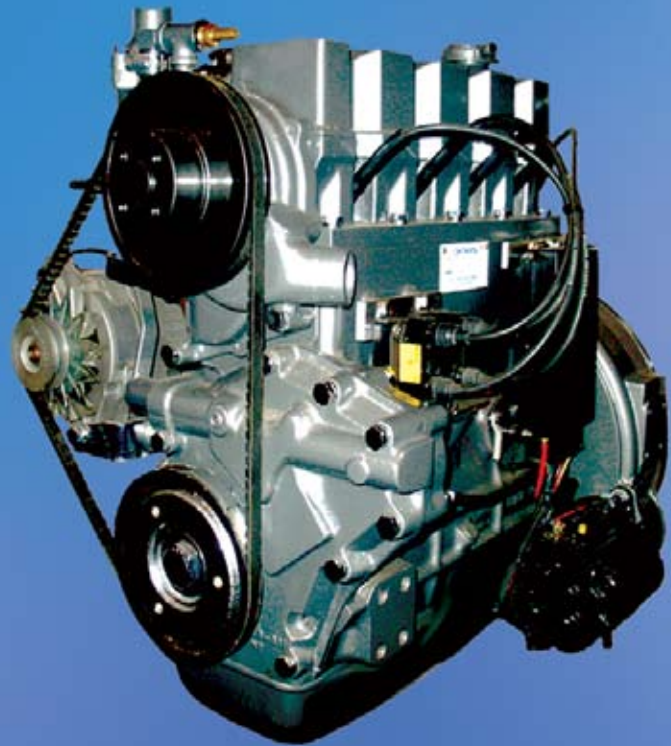

## **STANDARD FEATURES**

- 4-Cylinder
- Liquid-Cooled, OHV
- Five Main Bearings
- Heavy-Duty, Cast-Iron Block & Cylinder Head
- High Volume Water Pump
- 63 amp Alternator with Internal Regulator
- SAE #4 Flywheel Housing
- High Volume Oil Pump
- On Board Electronic Fuel Management System
- Full-Flow Oil Filter

## **WORLDWIDE PARTS & SERVICE**



We back our engines with a worldwide service network. Experienced Continental representatives are always ready to meet your needs.



**WISCONSIN  
MOTORS, LLC**

# CONTINENTAL TME27

## 74.0 HP GASOLINE DUAL FUEL, LPG & NG OPTIONS

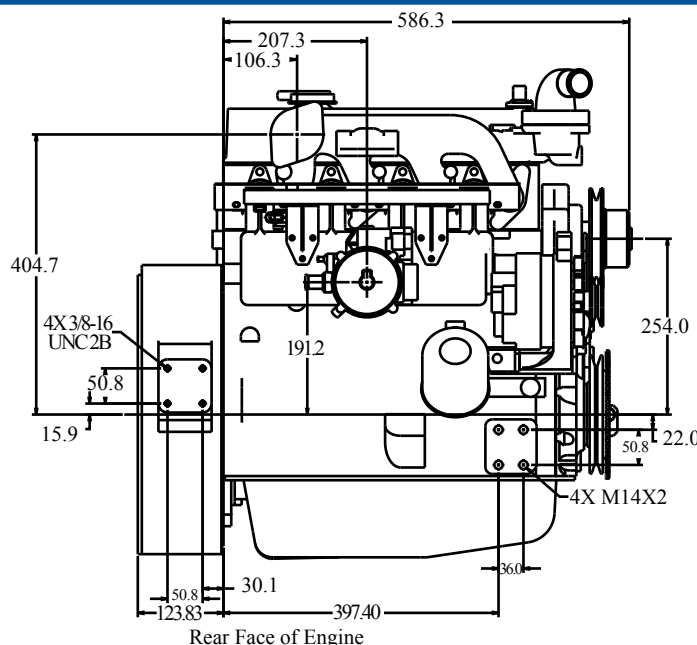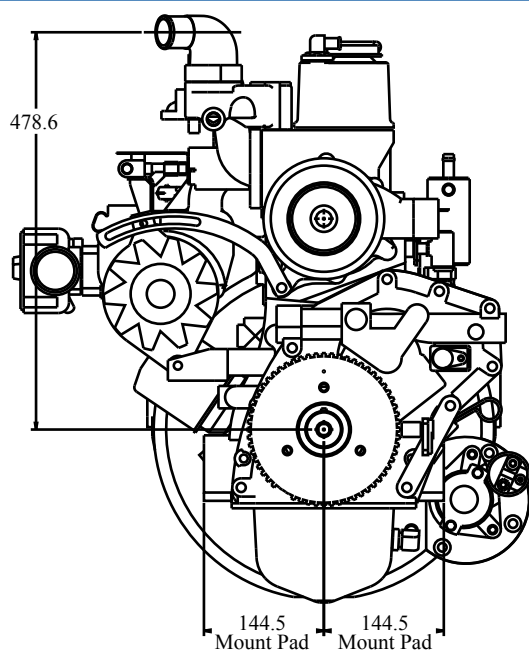

\* Net Weight Dry Standard Engine 535 lbs. (242.6 kg)

**Bore** ..... 3.58 in. (91 mm)  
**Stroke** ..... 4.06 in. (103.2 mm)  
**Displacement** ..... 164.7 cu. in. (2.7 L)

| RPM  | HP   | KW   | TORQUE  |
|------|------|------|---------|
|      |      |      | Ft. lbs |
| 1500 | 41.9 | 31.2 | 163.0   |
| 1800 | 50.4 | 37.6 | 163.3   |
| 2000 | 55.6 | 41.5 | 162.2   |
| 2400 | 64.7 | 48.2 | 157.3   |
| 2600 | 67.9 | 50.6 | 152.3   |
| 2800 | 70.1 | 52.3 | 146.1   |
| 3000 | 72.0 | 53.7 | 149.1   |
| 3200 | 74.0 | 55.2 | 134.3   |

### POWER OUTPUT

Maximum dynamometer net brake horsepower of the basic engine corrected to a pressure reading of 29.3 in. Hg (99 KPA) dry barometer and temperature of 77° F (25° C) when tested in accordance with SAE Test Code J1349. Engine output can be demonstrated within 5% at the factory under standard rating conditions. Power will decrease 3.5% for each 1000 ft. (305 M) above 500 ft. and 1% for each 10° F above standard temperature of 77° F (25° C). For continuous operation, applications should be limited to 80% of power shown.

### OPTIONS FOR EVERY NEED

- **SAE #3 Bell Housing**
- **Non-Certified Version for Stationary Applications**
- **Gas, LPG, Dual Fuel or Natural Gas Configurations**
- **Several Water Outlet Elbows**
- **Optional Oil Pan Drain Outlet Locations**
- **Various Flywheels**

\* Contact your Continental Representative for Additional Options



EXCLUSIVE AUTHORIZED DISTRIBUTOR

MARINDUSTRIEL  
 8550, DELMEADE  
 MONTRÉAL, (QC) H4T 1L7  
 TÉLÉ : 514.342.2748  
 800.363.2259  
 FAX : 514.342.6151  
 info-quebec@marind.ca

MARINDUSTRIAL INC.  
 80, HARRISVILLE BLVD, UNIT « A »  
 MONCTON, (NB) E1H 3N4  
 PHONE : 506.852.3332  
 800.463.3332  
 FAX : 506.857.8484  
 info-atlantic@marind.ca

MARINDUSTRIAL ONTARIO INC.  
 2320, BRISTOL CIRCLE, UNIT # 8  
 OAKVILLE, (ON) L6H 5S3  
 PHONE : 905.829.3004  
 800.866.3831  
 FAX : 905.829.4046  
 info-ontario@marind.ca