

WISCONSIN V465D

**65.9 HP GASOLINE
DUAL FUEL, LPG &
NG OPTIONS**

YOUR HEAVY-DUTY SOURCE OF POWER

Setting industry Standards since 1909, Wisconsin continues to offer you a wide selection of air-cooled gasoline engines. Five models allow you to choose from twin-cylinder and four-cylinder engines with power ranging from 18.0 to 65.9 HP.

WISCONSIN CONSTRUCTION

Wisconsin Engines are designed for those tough applications that require durability and long life reliability. The multi-cylinder, v-block design offers unique side load capability for a wide variety of industrial applications.



STANDARD FEATURES

- 4-Cylinder
- Air-Cooled
- V-Block Configuration
- Overhead Valve Design
- Forged-Steel Crankshaft with Tapered Roller Main Bearings
- Heavy-Duty Cast-Iron Block
- Cast Iron Cylinders
- Centrifugal Flyweight Governor
- Aluminum Alloy Pistons
- Dry Type Air Cleaner with Pre-Cleaner
- Electric Starter with 65 amp Belt-Driven Alternator or 30 amp Flywheel Alternator
- Heat Resistant Alloy Steel Exhaust Valves
- Instrument Panel
- Exhaust Valve Rotators
- Solid State Ignition with Side Mounted or Top Mounted Distributor
- High Temperature Safety Switch

*All Standard Features Listed Above are for a Non-Certified Version of the V465D


WORLDWIDE PARTS & SERVICE

We back our engines with a worldwide service network. Experienced Wisconsin representatives are always ready to meet your needs.



**WISCONSIN
MOTORS, LLC**

65.9 HP GASOLINE DUAL FUEL, LPG & NG OPTIONS

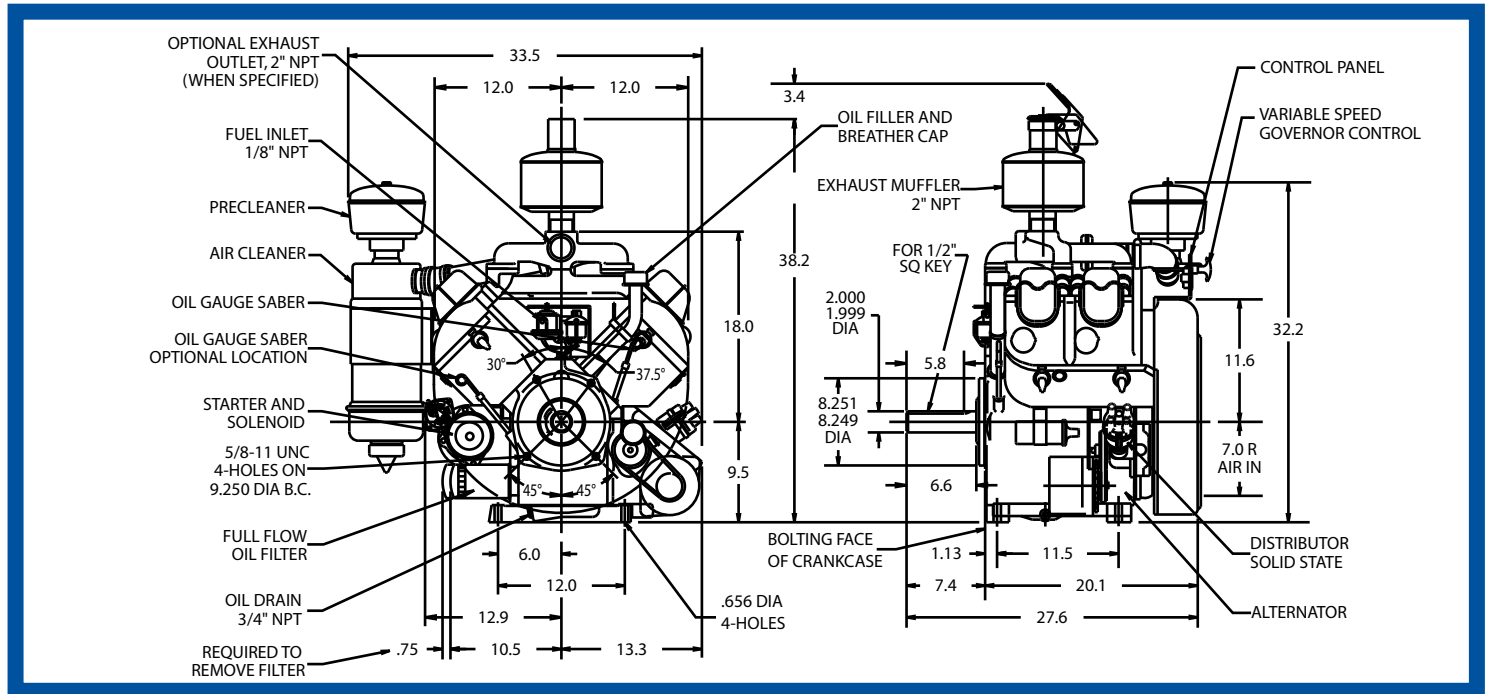

*** Net Weight Dry Standard Engine 530 lbs. (240 kg)**

OPTIONS FOR EVERY NEED

Bore 3.75 in. (95 mm)
Stroke 4.0 in. (102 mm)
Displacement 177 cu. in. (2901 cc)

			TORQUE
RPM	HP	KW	Ft. lbs
1600	41.6	31.0	136.6
1800	47.5	35.4	138.6
2000	52.4	39.1	137.6
2200	56.7	42.3	135.3
2400	60.0	44.8	131.2
2600	63.0	47.0	127.2
2800	64.5	49.2	121.0
3000	65.9	49.2	115.3

- **Dry Element and Tri-Phase Type Air Cleaners**
- **Bell Housings (SAE #4 & 5)**
- **Clutch Take-Off**
- **Clutch Reduction Assemblies (In Ratios Of 2, 3, or 4 to 1 with Clockwise or Counter-Clockwise Take-Off Shaft Rotation)**
- **Heavy-Duty Mufflers**
- **High-Temperature & Low Oil Safety Switches**
- **Accessory Drive for Hydraulic Pump**
- **Special Crankshaft Extensions & Stub Shafts**
- **37 amp Belt-Driven Alternator**

*** Contact your Wisconsin Representative for Additional Options**

POWER OUTPUT

Maximum dynamometer net brake horsepower of the basic engine corrected to a pressure reading of 29.31 in. Hg (99 KPA) dry barometer and temperature of 77° F (25° C) when tested in accordance with SAE Test Code J1349. Engine output can be demonstrated within 5% at the factory under standard rating conditions. Power will decrease 3.5% for each 1000 ft. (305 M) above 500 ft. and 1% for each 10° F above standard temperature of 77° F (25° C). For continuous operation, applications should be limited to 80% of power shown.



EXCLUSIVE AUTHORIZED DISTRIBUTOR

MARINDUSTRIEL
8550, DELMEADE
MONTRÉAL, (QC) H4T 1L7
TÉLÉ. : 514.342.2748
800.363.2259
FAX : 514.342.6151
info-quebec@marind.ca

MARINDUSTRIAL INC.
80, HARRISVILLE BLVD. U
MONCTON, (NB) E1H 3N4
PHONE : 506.852.3332
800.463.3332
FAX : 506.857.8484
info-atlantic@marind.ca

MARINDUSTRIAL ONTARIO INC.
2320, BRISTOL CIRCLE, UNIT # 8
OAKVILLE, (ON) L6H 5S3
PHONE : 905.829.3004
800.866.3831
FAX : 905.829.4046
info-ontario@marind.ca